




“myReference,,

RIGID 55

LOCK ACOUSTIC

Gerflor
theflooringgroup



RIGID


55

LOCK ACOUSTIC

177 x 1219 mm

225 x 1524 mm

457 x 914 mm




PUR+ MATT



Easy maintenance

4D DESIGN

STRUCTURED EMOSS & BEVEL



Ultra realistic surface

MATT SURFACE



Natural look

CRISTAL WEAR LAYER



High definition design & color

XL FORMAT

Wide variety of tiles & planks


FULL RIGID CORE TECHNOLOGY



Rigid



Max.



The best stability



Renovation ceramic 6 mm joint


INSULATION ULTRA

ACOUSTIC BACKING



18 dB

LOCK SYSTEM



Standard laminate installation



RIGID **55**

LOCK ACOUSTIC

177 x 1219 mm

PUERTO

VIAJO

HOBART

SUCRE

COCHA

QUITO

UYUNI TAUPE

LOVINA

CARTAGO

VIAJO GREY



225 x 1524 mm



457 x 914 mm



XL
PLANKS



PUNO PURE



PUNO BROWN



KILDA GOLDEN



KILDA SMOKED



KILDA CASHMERE



KILDA PEARL

XL
TILES



TRONDHEIM



NOOSA CORTEN



BELLO



GEELONG GREY



KILDA PEARL - 0019

225 x 1524 mm



KILDA CASHMERE - 0018

225 x 1524 mm



KILDA GOLDEN - 0015

225 x 1524 mm



KILDA SMOKED - 0020

225 x 1524 mm







PUNO PURE - 0017

225 x 1524 mm



PUNO PURE



PUNO BROWN



PUNO BROWN - 0016

225 x 1524 mm




TRONDHEIM - 0011

457 x 914 mm




NOOSA CORTEN - 0014

457 x 914 mm

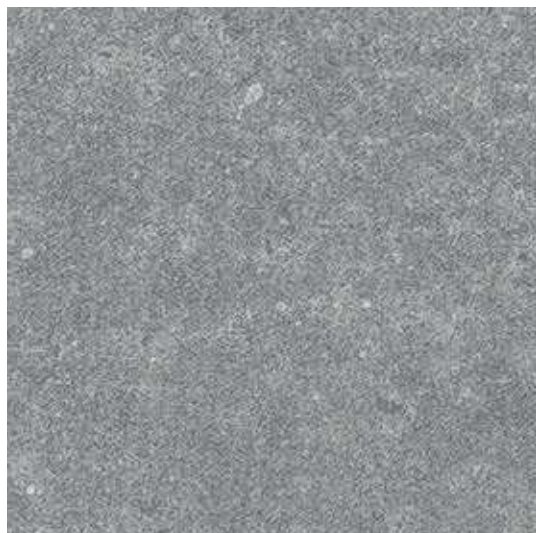


GEELONG GREY - 0012

457 x 914 mm

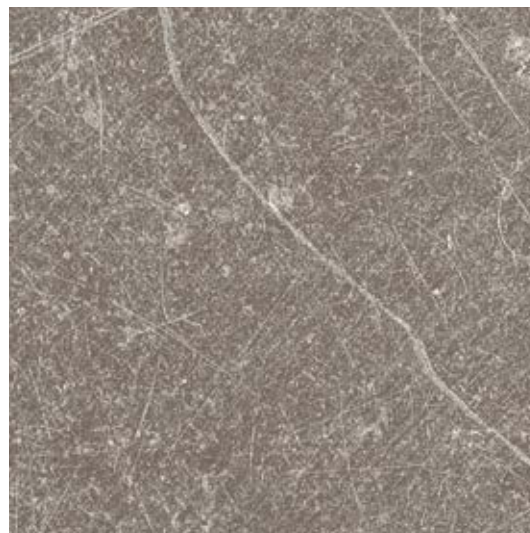

BELLO - 0013

457 x 914 mm

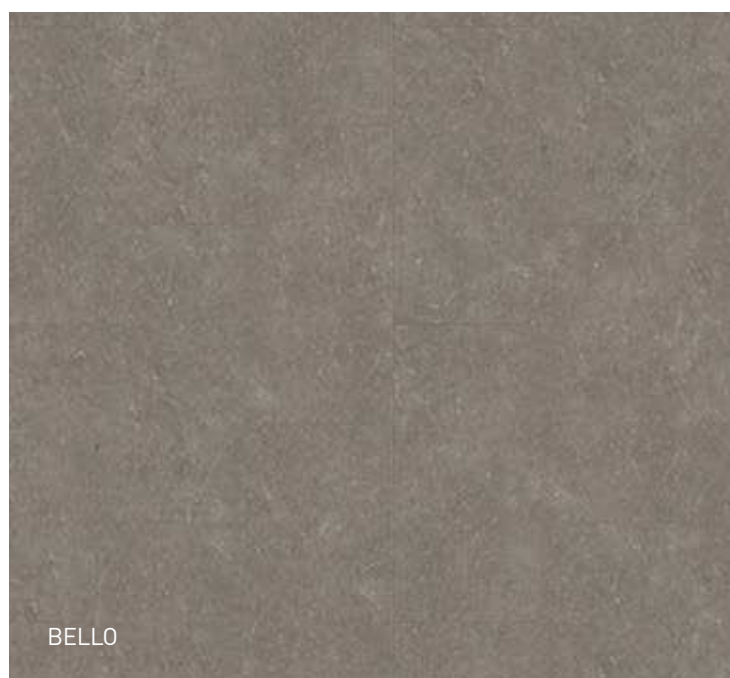

RIGID 55 LOCK ACOUSTIC
CLASSIC WOOD



PUERTO - 0001

177 x 1219 mm



VIAJO - 0003

177 x 1219 mm



VIAJO GREY - 0009

177 x 1219 mm



SUCRE - 0004

177 x 1219 mm




HOBART - 0002

177 x 1219 mm



HOBART

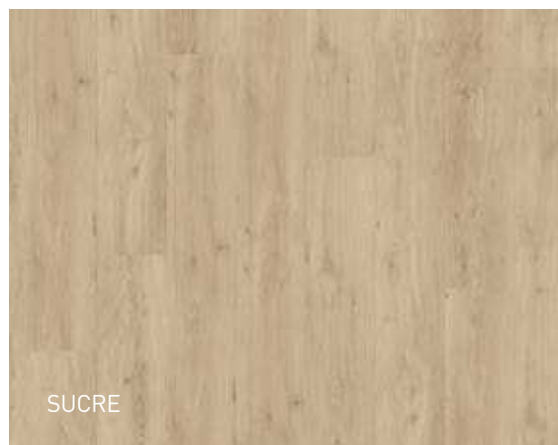

PUERTO



**RIGID 55 LOCK ACOUSTIC
RUSTIC WOOD PLANK**



LOVINA - 0008

177 x 1219 mm



CARTAGO - 0010

177 x 1219 mm



UYUNI TAUPE - 0006

177 x 1219 mm




QUITO - 0007

177 x 1219 mm




COCHA - 0005

177 x 1219 mm

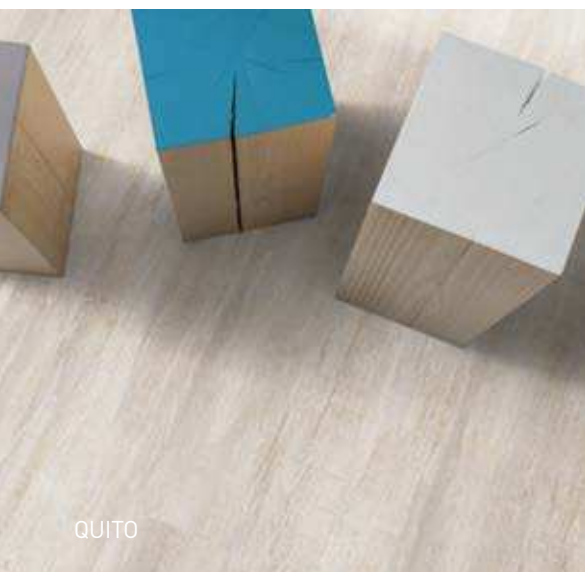

QUITO

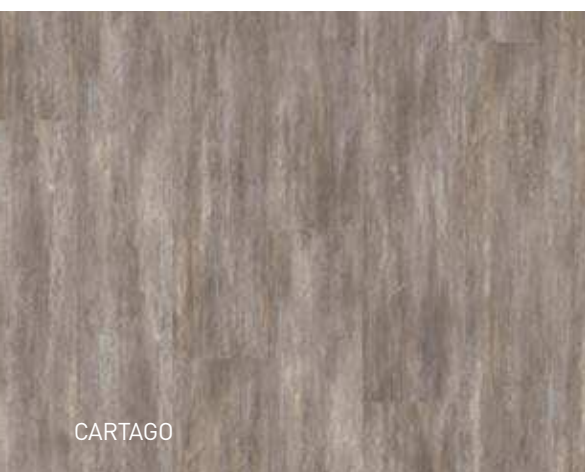

CARTAGO



COCHA





LOVINA



UYUNI TAUPE



RIGID 55 LOCK ACOUSTIC A FULL SET OF FINISHES

DESIGN SKIRTINGS




Vinyl design skirting
Ref. 6086


- Up to 80sqm room only




MDF design skirting
Ref. 5947



OTHER SKIRTINGS

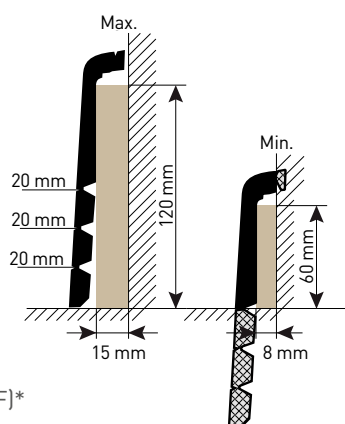


Cover skirting (MDF)*
Ref. 2550




Insert skirting (aluminium)*
Ref. 3543 / 2260

STAIRNOSING SOLUTION

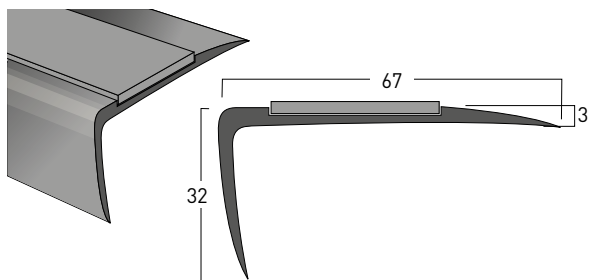


Nosing T67 (aluminium)
Ref. 0503




Double edge nosing, decoration series (aluminium)*
Ref. 1605

I PROFILES

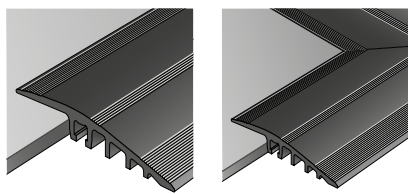

0505

1513



Ramp 5-6mm (aluminium)
Ref. 0505



I ENTRANCE MATS



Looselay Romat GT insert kit
Ref. 1719



Quick mat*
Ref. 8550

I FLOOR PROTECTION



Floor protection
Ref. 058X

*Please contact Romus www.romusworld.com or Gradus www.gradusworld.com.
Romus and Gradus are part of Gerflor group.

FOR MORE DETAILS
visit gerflor.com



FINISHING SOLUTIONS
Special LVT

Gerflor
theflooringroup

LVT finishes brochure

RIGID 55 LOCK ACOUSTIC EQUIVALENCE RIGID 55 LOCK SYSTEM & CREATION 55

	RIGID 55 LOCK ACOUSTIC	CREATION 55 GLUE DOWN / CLIC	CREATION 55 LOOSELAY
	CARTAGO - 0010	AMADOR - 0447	AMADOR - 0447
	HOBART - 0002	BALLERINA - 0347	BALLERINA - 0347
	KILDA CASHMERE - 0018	SWISS OAK CASHMERE - 0795	-
	KILDA SMOKED - 0020	SWISS OAK SMOKED - 0847	-
	KILDA PEARL - 0019	SWISS OAK PEARL - 0846	SWISS OAK PEARL - 0846
	KILDA GOLDEN - 0015	SWISS OAK GOLDEN - 0796	SWISS OAK GOLDEN - 0796
	VIAJO - 0003	BOSTONIAN OAK - 0871	-
	VIAJO GREY - 0009	BOSTONIAN OAK GREY - 0855	-
	PUNO BROWN - 0016	CEDAR BROWN - 0850	-
	PUNO PURE - 0017	CEDAR PURE - 0849	-
	BELLO - 0013	CARMEL - 0618	CARMEL - 0618
	QUITO - 0007	ARENA - 0060	ARENA - 0060
	COCHA - 0005	MALUA BAY - 0448	MALUA BAY - 0448
	SUCRE - 0004	TWIST - 0504	SUCRE - 0004
	TRONDHEIM - 0011	NORVEGIAN STONE - 0860	NORVEGIAN STONE - 0860
	NOOSA CORTEN - 0014	RUST CORTEN - 0095	-
	UYUNI TAUPE - 0006	PAINT WOOD TAUPE - 0856	-
	LOVINA - 0008	RANCH - 0456	RANCH - 0456
	PUERTO - 0001	QUARTET - 0503	-
	GEELONG GREY - 0012	BLOOM UNI GREY - 0869	-

INSTALLATION



LOCK SYSTEM



CUTTING WITH A SAW

RIGID 55 LOCK ACOUSTIC

TECHNICAL DATA

RIGID 55 LOCK ACOUSTIC

DESCRIPTION / BESCHREIBUNG / BESCHRIJVING / DESCRIPTION / DESCRIPCIÓN / DESCRIÇÃO / DESCRIZIONE

Total Thickness / Gesamtdicke / Totale dikte / Épaisseur totale / Espesor total / Essessura total / Spessore totale	EN ISO 24346 [EN 428]	mm	6.00
Thickness of the wearlayer / Dicke der Nuttschicht / Dikte van de slijtlaag / Épaisseur couche d'usure / Espesor capa de uso / Essessura camada de desgaste / Spessore strato di usura	EN ISO 24340 [EN 429]	mm	0.55
Weight / Flächengewicht / Gewicht / Poids / Peso / Peso / Peso	EN ISO 23997 [EN 430]	g/m²	9480
Size / Format / Afmetingen / Format / Dimensiones / Dimensões / Dimensieone	ISO 24342 [EN 427]	mm	177x1219 225x1524 457x914

CLASSIFICATION / KLASSIFIKATION / CLASSIFICATIE / CLASSIFICATION / CLASIFICACIONES / CLASSIFICAÇÕES / CLASSIFICAZIONI

Norm/Product Specification / Produktnorm / Technische eigenschappen / Norme / Spécification produit / Normas / Normas / Norma prodotto	-	-	EN ISO 10582 [EN 649]
European Classification / Europäische Klassifizierung / Europese classificatie / Classement européen / Clasificación europea / Classificação Europeia / Europea	EN ISO 10874 [EN 485]	Class	33 - 42
Avis technique	-	N° AT	12/15-1707
Fire Rating / Brandverhalten / Brand classificatie / Classement Feu / Fuego / Fogo / Reazione al fuoco	EN 13 501-1	Class	Bfl-s1
Static Electrical Propensity / Begehaufldung / Elektrische eigenschappen / Potentiel de charge / Comportamiento electrostático / Comportamento electrostático / Resistenza elettrica	EN 1815	kV	< 2
Slip Resistance Wet / Rutschhemmung / Anti-slip / Glissance humide / Deslizamiento húmedo / Escorregamento húmido / Scivolosità umida	DIN 51130 / BGR 181	Class	R10 ⁽¹⁾

PERFORMANCES / TECHNISCHE EIGENSCHAFTEN / TESTRESULTAAT / PERFORMANCE / CUALIDADES TÉCNICAS / PERFORMANCES / CARATTERISTICHE TECNICHE

Wear Resistance / Verschleißverhalten / Slijtvastheid / Résistance à l'usure / Abrasión / Abrasão / Resistenza all'abrasione	EN 660.2	mm³	≤ 2.0
Wear Group / Verschleißgruppe / Groep slijtvastheid / Groupe d'abrasion / Grupo de abrasión / Grupo de abrasão / Gruppo di abrasione	EN 652	group	T
Dimensional Stability / Maßstabilität / Maatvastheid / Stabilité dimensionnelle / Estabilidad dimensional / Estabilidade dimensional / Stabilità dimensionale	EN ISO 23999 [EN 434]	%	≤ 0.05
Residual Indentation / Resteindruck / Indrukbelasting / Poinçonnement statique rémanent / Punzonamiento / Punçoamento / Impronta	EN ISO 24343-1 [EN 433]	mm	≤ 0.10
Impact sound insulation / Trittschallverbesserungsmaß / Geluidsisolatie / Isolation acoustique bruits de chocs / Acústica / Isolamento acústico	EN ISO 717-2	dB	18
Room Impact / Raumschall / Loopgeluid / Sonorité à la marche / Rumore al calpestio / Sonoridad en la pisada / Sonoridade ao andar	NFS S 31074	dB	75
Castor chair test / Stuhlrollenbeanspruchung / Rolweerstand bureaustoelen / Essai de la chaise à roulettes / Determinación del efecto de una silla con ruedas / Resistência a cadeiras de rodas / Resistenza al passaggio di sed [Type W]	ISO 4918 [EN 425]	-	OK
Thermal Conductivity / Wärmeleitfähigkeit / Thermische weerstand / Conductivité thermique / Conductividad térmica / Contutividade térmica / Resistenza termica / Värmeledningsmotstånd / Varmemotstånd	EN ISO 10456 [EN12524]	W/(m.K)	0.25
Colour Fastness / Lichtechtheit / Lichtechtheid / Solidité lumière / Resistencia a la luz / Estabilidade das cores / Solidità alla luce	EN 20 105 - B02	degree	≥ 6
Surface Treatment / Oberflächenvergütung / Oppervlaktebehandeling / Traitement de surface / Tratamiento de superficie / Tratamento de superficie / Trattamento di superficie	-	-	PUR+ Matt
Chemical Products Resistance / Verhalten gegenüber Chemikalien / Chemische bestendigheid / Résistance aux produits chimiques / Resistencia a los productos químicos / Resistência aos produtos químicos / Resistenza ai prodotti chimici ⁽²⁾	EN ISO 26987 [EN 423]	-	OK

ENVIRONMENT/INDOOR AIR QUALITY / UMWELT/RAUMLUFTQUALITÄT / ENVIRONNEMENT/QUALITE DE L'AIR INTERIEUR / MEDIO AMBIENTE/CALIDAD INTERIOR DEL AIRE INTERIOR / MEIO AMBIENTE/QUALIDADE DO AR INTERIOR

TVOC after 28 days / TVOC (28 Tage) / TVOC (28 dagen) / TVOC après 28 jours / TVOC (28 dias) / TVOC (28 dias) / TVOC (28 giorni) / TVOC (28 dagar) / TVOC (28 dagar)	ISO 16000-6	µg/m³	< 100
Certification / Zeugnis / Certification / Certificado / Certificação	-	-	-

CE MARKING / CE KENNZEICHNUNG / EG_CONFORMITEITSMERK / MARQUAGE CE / MARCA DE CONFORMIDAD CE / MARCA DE CONFORMIDADE CE / MARCATURA CE DI CONFORMITA

CE	EN 14041	-	   
----	----------	---	---

(1) Glissance humide / Slip resistance wet / Rutschhemmung : details sur site gerflor.com / details on website gerflor.com / Einzelheiten auf der web-site gerflor.com

(2) Beständig gegenüber nicht färbenden alkoholhaltigen Handdesinfektionsmitteln, Haushaltschemikalien und verdünnten Säuren und Laugen bei kurzzeitiger Einwirkung.

Gerflor International
Tel: +33 (0)4 74 05 40 00
Fax: +33 (0)4 74 05 03 13
e-mail: gerflorcontract@gerflor.com

Visualize your reference



interiordesigner.gerflor.com

30 years experience

Since 1985

Manufacturer

3 LVT Factories

World Class Logistics

12 Logistics Hubs

Gerflor Design Centre

Exclusive Designs



“Serenity,,
Elodie - **End User**



“Time saving,,
Mika - **Installer**



“Unique Design,,
Pierre - **Architect**



“Confidence,,
Claire - **Store Manager**



“Reliability,,
Lucas - **Distributor**

That's why Creation is our **Reference**

Gerflor[®]
theflooringgroup